


South
Design Konstantin Grcic, 2023

Low armchair, suitable for outdoor.

In steel tube and steel wire, cataphoretically treated and painted in polyester powder.
Pivoting feet.
Available also woven matting.



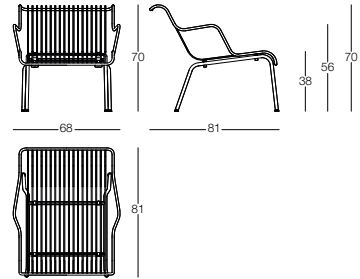

9401.79.00

0,548 m³

94x72x81


21,70 kg

18,20 kg

Art. nr.	Armchair in steel tube and wire
SD2960	colours

Woven matting, suitable for outdoor.

In 100% polyolefin.





5609.00.00

0,008 m³

12x12x57

2,09 kg

1,09 kg

Art. nr.	Woven matting
AC902	colours

Steel tube and wire	Woven matting
 orange 5279	 red/orange
 bordeaux 5280	 blue/light blue
 light blue 5276	
 night blue 5282	

Test
ANSI-BIFMA X5.4-2020/21
Leg sideways static load test EN 1728:2012+AC:2013, L2
Leg forward static load test EN 1728:2012+AC:2013, L2
Seat and back static load test EN 1728:2012+AC:2013, L2
Arm sideways static load test EN 1728:2012+AC:2013, L2
Vertical load on back rest EN 1728:2012+AC:2013, L2
Vertical upwards static load on arm rests EN 1728:2012+AC:2013, L2
Arm downwards static load test EN 1728:2012+AC:2013, L2
Seat and back fatigue test EN 1728:2012+AC:2013, L2

Seat front edge durability test EN 1728:2012+AC:2013, L2
Arm fatigue test EN 1728:2012+AC:2013, L2
Seat impact test EN 1728:2012+AC:2013, L2
Back impact test EN 1728:2012+AC:2013, L2
Arm rest impact test EN 1728:2012+AC:2013, L2
Stability EN 1022:2005
Stability EN 1022:2018
Safety requirements EN 16139:2013
Information for use EN 16139:2013



STANDARD
100

084987.0
CENTROCOT